



DX SERIES COILS

DEDICATED HORIZONTAL ALUMINUM COIL



Unit shown with service panels removed. Representative image only. Some models may vary in appearance.

STANDARD FEATURES

- Rifled aluminum tubing, enhanced aluminum fins.
- Multi-stage leak testing at 500 psi pressure decay, mass spectrometer tested with Helium, then Nitrogen pressurized and factory sealed optimal system integrity and long-term reliability.
- Refrigerant lines exit top of coil. Schrader valve on liquid line or internally mounted factory installed TXV for pressure assurance testing. Refrigerant and plumbing connections:
 - **All Drain Pan Connections:** 3/4" NPT
- Heavy duty polypropylene drain pans.
- Inlet and outlet opening dimensions are identical (without end caps).
- Three-piece service door on top for easy service access.
- Fully insulated cabinets with faced insulation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance.
- ETL listed for R22 and R410A. ETL listed for R454B and R32 with Refrigerant Detection System (RDS).

WARRANTY

- Ten-year limited warranty with registration.

CUSTOMIZATION OPTIONS*

UNIVERSAL A2L REFRIGERANT TECHNOLOGY FOR R32 & R454B SYSTEMS



IDEAL FOR USE WITH BOTH CASSED AND UNCASSED COILS, PLUS ALL AIR HANDLERS!

Versa Pro coils are easily configurable for use with either R32 or R454B refrigerant with proper metering device. Utilizing universal Refrigerant Detection Systems (RDS) to ensure regulatory compliance.

OTHER POPULAR CUSTOM OPTIONS:

- Refrigerant Detection System (RDS) kit factory-installed.
- Factory or field-installed TXV available.

DOWNFLOW KIT OPTIONS:

METAL DRAIN PANS

- 16" DWNFLWM-16
- 18" DWNFLWM-18

PLASTIC DRAIN PANS

- DWNFLWP

DX-SS-C-007



R-410A • R-22 • R-454B • R-32
REFRIGERANT READY
WHEN PROPER METERING DEVICE IS USED




In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510 Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com



WWW.ASPENMFG.COM

FIGURE 1

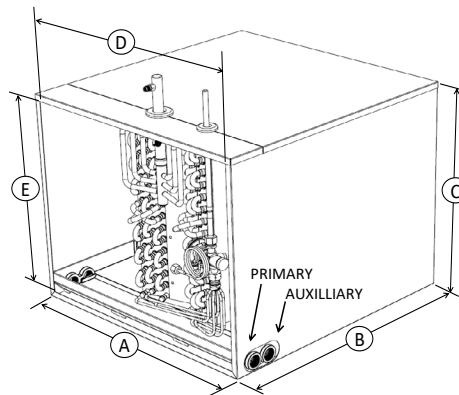

PERFORMANCE & DIMENSIONAL DATA (In.) - FIGURE 1

COIL MODEL	NOM. CAPACITY	DIMENSIONS					SHIPPING INFO.			
		CABINET			INSIDE		WEIGHT (LBS)			SKID QTY
		WIDTH	DEPTH	HEIGHT	WIDTH	HEIGHT	# OF ROWS			
	BTU	A”	B”	C”	D”	E”	2	3	4	
DX24A*	24,000	21	22	14-1/2	20	13-1/2	-	35	39	16
DX24B*		21	22	15	20	14	-	37	42	16
DX24E*		21	27	17-1/2	20	16-1/2	42	50	57	16
DX30A*	30,000	21	22	15	20	14	-	37	42	16
DX30E*		21	27	17-1/2	20	16-1/2	-	50	57	16
DX36A*	36,000	21	22	15	20	14	-	37	42	16
DX36B*		21	27	17-1/2	20	16-1/2	-	47	53	16
DX36C*		21	22	17-1/2	20	16-1/2	-	41	47	16
DX36E*		21	27	21	20	20	-	58	67	12
DX42C*	42,000	21	27	21	20	20	-	65	74	12
DX42D*		21	32	21	20	20	-	49	56	6
DX48A*	48,000	21	27	17-1/2	20	16-1/2	-	56	64	16
DX48B*		21	27	21	20	20	-	56	65	12
DX48C*		21	27	21	20	20	-	66	75	12
DX48D*		21	32	21	20	20	-	58	67	6
DX60A*	60,000	21	27	21	20	20	-	66	75	6
DX60B*		21	32	21	20	20	-	77	90	6
DX60C*		21	32	24-1/2	20	23-1/2	-	79	91	6
DX60D*		21	32	25	20	24	-	82	95	6
DX60E*		21	32	25	20	24	-	69	79	6
DX60F*		21	32	24-1/2	20	23-1/2	-	69	79	6

DRAIN PAN TEMPERATURE TABLE

DRAIN PAN TYPE	TEMPERATURE LIMITS
Plastic - Standard	290°

HELPFUL LINKS



VIEW PRODUCT ONLINE

For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.



VIEW VERSA PRO ONLINE

Learn more about Aspen's A2L Refrigerant Technology for R32 and R454B Systems.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510 Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com