


## Product Features and Specifications

- Rifled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Liquid line - 3/4" ODS, suction line - 3/4" ODS on 1-1/2-3 ton and 7/8" ODS on 3-1/2 - 5 ton.
- Externally mounted flowrator body with Schrader valve for hiss-testing.
- Split access doors for easy service.
- Fully insulated cabinets with faced insulation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Ten-year limited warranty. For complete warranty details, please visit [www.AspenMfg.com](http://www.AspenMfg.com)

## Customization

- Factory or field-installed TXV available.
- Schrader mounted on suction manifold, external to cabinet.

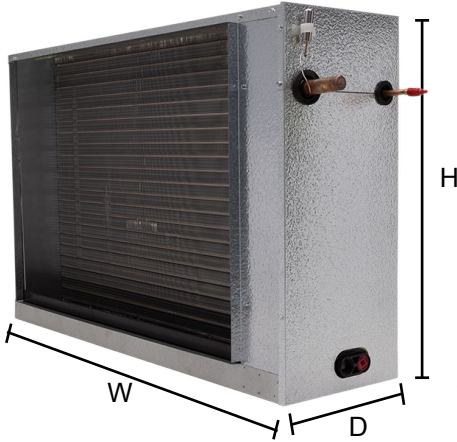

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Duct opening dimensions can be ascertained by subtracting 1-1/2" for top opening width/depth, 3/4" for bottom opening.

COIL MODEL	NOMINAL CAPACITY (BTUs)	FLOW RATOR SIZE R 410-A	DIMENSIONS					SHIPPING INFORMATION				
			WIDTH (W)"		HEIGHT (H)"	OPENING			SHIPPING WEIGHT (LBS)			SKID QTY
			A"	B"		C"	D	E"	2 ROW	3 ROW	4 ROW	
CH24A*	24,000	0.055	10	23-1/2	21	16	21-1/2	20	34	N/A	14	
CH24B*		0.055	10	23-1/2	21	24	29-1/2	29	43	N/A	14	
CE30A*	30,000	0.059	10	23-1/2	21	24	29-1/2	29	43	N/A	14	
CE30B*		0.059	10	23-1/2	21	30	35-1/2	35	49	N/A	14	
CE36A*	36,000	0.068	10	23-1/2	21	30	35-1/2	35	49	N/A	14	
CE36B*		0.068	10	23-1/2	21	36	41-1/2	42	56	N/A	8	
CE42A*	42,000	0.074	10	23-1/2	21	30	35-1/2	N/A	49	N/A	14	
CE48A*	48,000	0.080	10	23-1/2	21	36	41-1/2	N/A	56	70	8	
CE48B*		0.080	10	23-1/2	21	42	47-1/2	N/A	66	80	8	

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°