



SINGLE CIRCUIT COIL

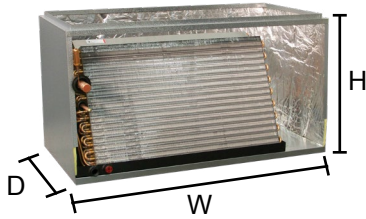

DOUBLE CIRCUIT COIL

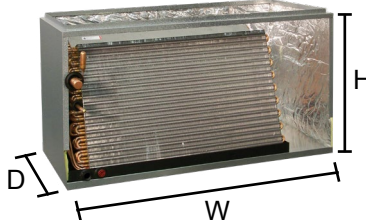

### Product Features and Specifications

- Rifled copper tubing, aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- 3/4" FPT plumbing connections.
- Left-hand refrigerant and plumbing connections.
- Factory-mounted TXV (R-410a - AC & HP compatible).
- Powder-painted galvanized steel drain pans. Stainless available.
- Embossed galvanized cabinets standard. Cabinets feature furnace connectors (patent pending).
- Upflow only. (Slab horizontal coils also available.)
- Split access doors in front for easy access.
- Fully insulated cabinets with faced insulation.
- ETL listed for use with R-410A, R-454A, and R-32 when proper metering device is used.
- Five-year limited warranty. For complete warranty details, please visit [www.AspenMfg.com](http://www.AspenMfg.com)

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Duct opening dimensions can be ascertained by subtracting 1-1/2" for top opening width/depth, 3/4" for bottom opening.

COIL MODEL	DIMENSIONS					SUCTION LINE	LIQUID LINE	SHIPPING INFORMATION	
	COIL WIDTH (W)"	CABINET						SHIPPING WEIGHT (LBS)	SKID QTY
		MIN WIDTH	MAX WIDTH	DEPTH (D)"	HEIGHT (H)"				
<b>SINGLE CIRCUIT COILS</b>									
CC072A34-XXXL-000	24	30	36	21-1/2	22	7/8	3/8	84	4
CC072B34-XXXL-000	30	36	42					105	
CC072C34-XXXL-000	36	42	48					126	
CC090A34-XXXL-000	30	36	42			1-1/8	1/2	105	
CC090B34-XXXL-000	36	42	48					126	
CC090C34-XXXL-000	42	48	54					147	
CC120A34-XXXL-000	30	36	42					105	
CC120B34-XXXL-000	36	42	48					126	
CC120C34-XXXL-000	42	48	54					147	
CC120D44-505R-000	43	50-1/2	50-1/2					140	
<b>DOUBLE CIRCUIT COILS</b>									
CC072A44-XXXL-12*	24	30	36	21-1/2	22	7/8	3/8	103	4
CC072B44-XXXL-12*	30	36	42					128	
CC072C44-XXXL-12*	36	42	48					154	
CC090A44-XXXL-12*	30	36	42			1-1/8	1/2	128	
CC090B44-XXXL-12*	36	42	48					154	
CC090C44-XXXL-12*	42	48	54					180	
CC090A44-XXXL-12*	30	36	42					128	
CC120B44-XXXL-12*	36	42	48					154	
CC120C44-XXXL-12*	42	48	54					180	

Notes: Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1-1/2 from width or depth. Bottom duct opening size can be obtained by subtracting 3/4 from width or depth. CC120D coil available only in 50 1/2" width, but can fit multiple furnace dimensions with supplied block off plates. (\*0 = 50/50 circuit split; 1 = intertwined circuits).

DUAL CIRCUIT COMMERCIAL COILS	SINGLE CIRCUIT R410A TXV	DUAL CIRCUIT USE 2 R410A TXV
CC72**(*)	(4) 4202	(4) 4200
CC90**(*)	(4) 3947+3948	(4) 4202
CC120**(*)	(4) 3947+3948	(4) 4202

CCcomm Spec-2024-11-V002

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°