




# CC SERIES


## LIGHT COMMERCIAL CASED COPPER UPFLOW EVAPORATOR COIL

### FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

#### SINGLE CIRCUIT COIL

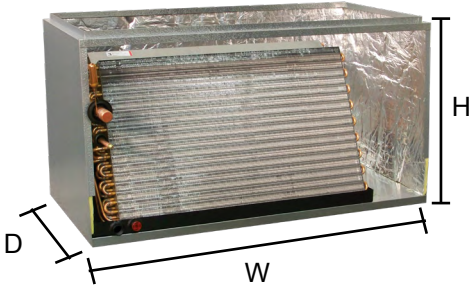

#### DOUBLE CIRCUIT COIL

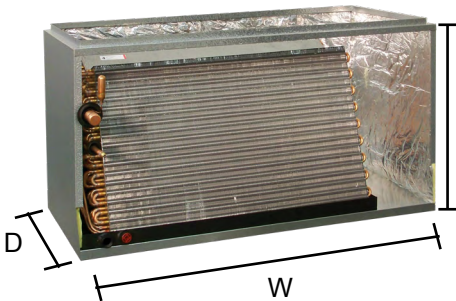

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice. Duct opening dimensions can be ascertained by subtracting 1.50 for top opening width/depth, 3/4" for bottom opening.

#### FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Left or right-hand refrigerant and plumbing connections.
  - 3/4" FPT plumbing connections.
- Embossed galvanized cabinets standard. Cabinets feature furnace connectors (patent pending).
- Factory-mounted TXV (R-410a - AC & HP compatible).
- Immersion-tested at 500 psi, then Nitrogen-pressurized and sealed.
- Upflow only. (Slab horizontal coils also available.)
- Split access doors in front of cabinet for easy service access.
- Fully insulated cabinets with foil-faced insulation.
- ETL listed for use with R-410A, R-454B, and R-32 when proper metering device is used.
- Five-year limited warranty.



**WANT MORE INFORMATION ON ASPEN'S  
CC SERIES LIGHT COMMERCIAL  
EVAPORATOR COILS?**

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE

*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website.  
To view this coil's product information online for the most up-to-date information scan the QR Code.*



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CCcomm Spec-2025-03

# SPECIFICATIONS & PERFORMANCE:

COIL MODEL	DIMENSIONS					PLUMBING CONNECTIONS		SHIPPING INFO.	
	COIL	CABINET				SUCT. LINE	LIQ. LINE	WEIGHT (LBS)	SKID QTY
	WIDTH	MIN. WIDTH	MAX. WIDTH (W)	DEPTH (D)	HEIGHT (H)				
<b>SINGLE CIRCUIT COILS</b>									
CC072A34-XXXL-000	24	30	36	21.50	22	7/8	3/8	84	4
CC072B34-XXXL-000	30	36	42			7/8	3/8	105	
CC072C34-XXXL-000	36	42	48			7/8	3/8	126	
CC090A34-XXXL-000	30	36	42			1-1/8	1/2	105	
CC090B34-XXXL-000	36	42	48			1-1/8	1/2	126	
CC090C34-XXXL-000	42	48	54			1-1/8	1/2	147	
CC120A34-XXXL-000	30	36	42			1-1/8	1/2	105	
CC120B34-XXXL-000	36	42	48			1-1/8	1/2	126	
CC120C34-XXXL-000	42	48	54			1-1/8	1/2	147	
CC120D44-505R-000	43	50-1/2	50-1/2			1-1/8	1/2	140	
<b>DOUBLE CIRCUIT COILS</b>									
CC072A44-XXXL-12*	24	30	36	21.50	22	7/8	3/8	103	4
CC072B44-XXXL-12*	30	36	42			7/8	3/8	128	
CC072C44-XXXL-12*	36	42	48			7/8	3/8	154	
CC090A44-XXXL-12*	30	36	42			1-1/8	1/2	128	
CC090B44-XXXL-12*	36	42	48			1-1/8	1/2	154	
CC090C44-XXXL-12*	42	48	54			1-1/8	1/2	180	
CC090A44-XXXL-12*	30	36	42			1-1/8	1/2	128	
CC120B44-XXXL-12*	36	42	48			1-1/8	1/2	154	
CC120C44-XXXL-12*	42	48	54			1-1/8	1/2	180	

Notes: Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1.50 from width or depth. Bottom duct opening size can be obtained by subtracting 3/4 from width or depth. CC120D coil available only in 50 1/2" width, but can fit multiple furnace dimensions with supplied block off plates. (\*0 = 50/50 circuit split; 1 = intertwined circuits).

DUAL CIRCUIT COMMERCIAL COILS	SINGLE CIRCUIT R410A TXV	DUAL CIRCUIT USE 2 R410A TXV
CC72**(*)	(4) 4202	(4) 4200
CC90**(*)	(4) 3947+3948	(4) 4202
CC120**(*)		

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CCcomm Spec-2025-03